



SPECIFICATIONS SPESIFIKASI

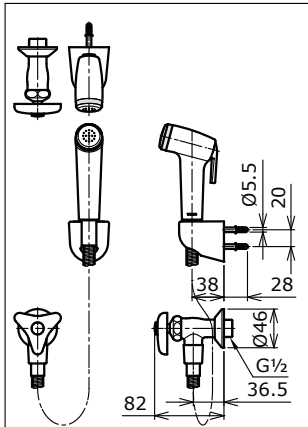

TX403SMCR
Shower Spray
w/ Stop Valve, Chrome

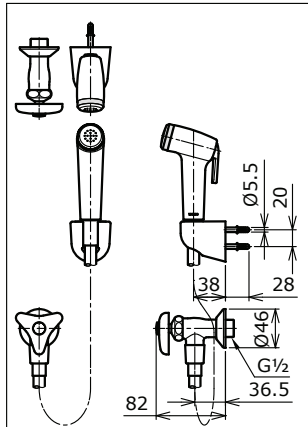

TX403S
Shower Spray w/ Stop Valve


Optional Color
TX403S#PIV = Pastel Ivory
TX403S#N5 = Black
TX403S#W = White

OPERATING CONDITIONS KONDISI OPERASIONAL

1. Water supply pressure : 0.05 ~ 0.75 MPa.
Tekanan sumber air: 0.05 ~ 0.75 MPa.
2. Ensure that water supply is clean (No Sand, Dirt, Etc.)
Pastikan kondisi sumber air adalah bersih (tidak ada pasir, kotoran dan lain lain)

ATTENTION PERHATIAN

1. Don't use abrasive cleaners or solvents on faucets and fittings.
Jangan gunakan pembersih atau pelarut abrasif pada faucet dan fitting.
2. As the product model is constantly updated, the actual product may not look the same as it shown in the diagram, but the basic installation principles are the same.
Karena model produk terus mengalami pembaharuan, aktual produk mungkin tidak sama dengan gambar, tapi prinsip dasar pemasangan adalah sama.
3. Close the stop valve if it is not in use.
Tutup stop valve jika tidak digunakan.

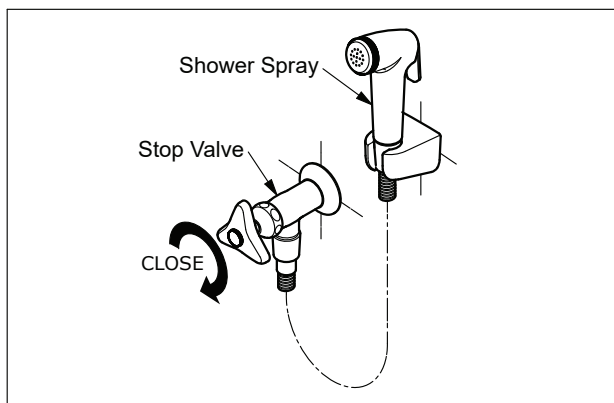


MAINTENANCE PEMELIHARAAN

All Finishes : Clean the finish with mild soap and warm water. Wipe entire surface completely dry with clean soft cloth. Many cleaners may contain chemicals, such as ammonia, chlorine, toilet cleaner etc. which could adversely affect the finish and are not recommended for cleaning

Seluruh lapisan : Bersihkan lapisan akhir dengan sabun lembut dan air hangat. Lap seluruh permukaan hingga benar-benar kering dengan kain lembut yang bersih. Kebanyakan bahan pembersih mungkin mengandung bahan kimia, seperti amonia, klorin, pembersih toilet, dll. yang dapat mempengaruhi hasil akhir dan tidak disarankan untuk membersihkannya

INSTALLATION PEMASANGAN

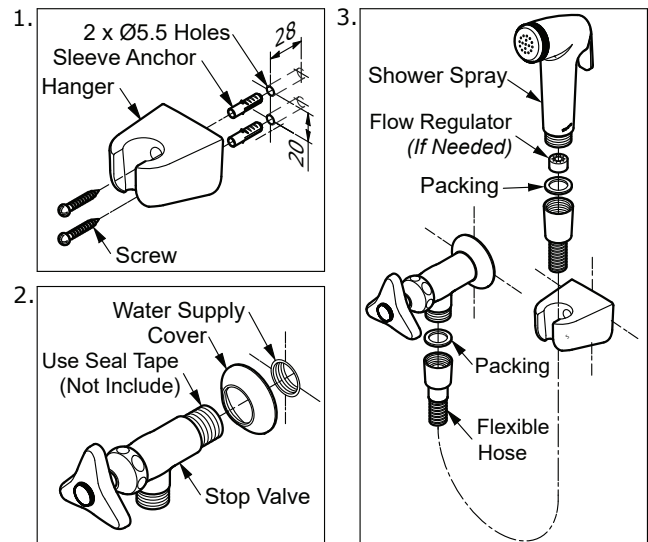

TROUBLESHOOTING PENYELESAIAN MASALAH

PROBLEM MASALAH	CHECK POINT POIN PERIKSA	SOLUTION SOLUSI
Water leaks around the handle Air bocor disekitar handle	1	Tighten Kencangkan
Handle is loose Handle longgar	2	Tighten Kencangkan
Water leaks around the hose Air bocor disekitar selang	3, 4	Tighten Kencangkan

