



SPECIFICATIONS



TX 445 SESM

"EGO II" Combination Bath & Shower Set



TX 445 SESV2N

"EGO II" Combination Bath & Shower Set
w/Double AgraFlexible Hose

OPERATING CONDITIONS

1. Water supply pressure : 0.05 ~ 0.75 MPa
2. Ensure that water supply is clean (No Sand, Dirt, Etc.).

MAINTENANCE

All Finishes : Clean the finish with mild soap and warm water. Wipe entire surface completely dry with clean soft cloth. Many cleaners may contain chemicals, such as ammonia, chlorine, toilet cleaner etc. which could adversely affect the finish and are not recommended for cleaning

INSTALLATION

- 1** MOUNT CONNECTORS PARALLEL WITH THE WALL

Hot Water Supply

150±10

Cold Water Supply

Use Seal tape (Not Include)

Leg

150

2 * Tighten the nut

Body

Packing

Cover

O-Ring

Nut *

3

2 X Ø8 Holes

Sleeve Anchor

Hanger

Screw

40

20

4

Massage Spray Button

Rain Spray Button

Packing


Hand Shower

Packing

Flexible Hose

TROUBLESHOOTING


PROBLEM	CHECK POINT	SOLUTION
Unsatisfactory spray	1	Clean
Flow rate unsatisfactory	2	Remove & Clean
Water leaks around the handle	3	Tighten
Handle is loose	4	Tighten

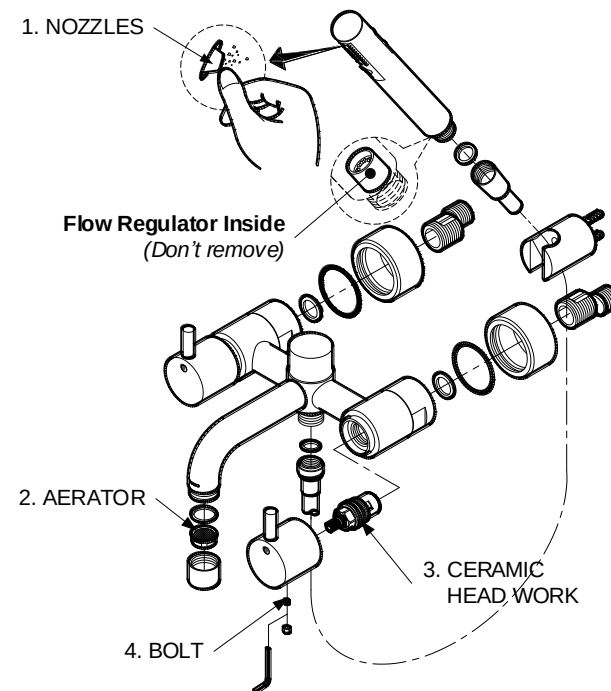

ATTENTION


1. Don't use abrasive cleaners or solvents on faucets and fittings.
2. Flow Regulator should not be remove because it could damage the system
3. As the product model is constantly updated, the actual product may not look the same as it shown in the diagram, but the basic installation principles are the same.
4. The hot water supply side of the faucets is in a condtion of high temperature. Do not allow skin to contact with the hardware surface directly. Otherwise, scalding may occur.

SPEKIFIKASI



TX 445 SESM

"EGO II" Combination Bath & Shower Set



TX 445 SESV2N

"EGO II" Combination Bath & Shower Set
w/ Double Agraff Flexible Hose





KONDISI OPERASIONAL

1. Tekanan sumber air: 0.05 ~ 0.75 MPa.
2. Pastikan kondisi sumber air adalah bersih (tidak ada pasir, kotoran dan lain lain)

PEMELIHARAAN


Seluruh lapisan : Bersihkan lapisan akhir dengan sabun lembut dan air hangat. Lap seluruh permukaan hingga benar-benar kering dengan kain lembut yang bersih. Kebanyakan bahan pembersih mungkin mengandung bahan kimia, seperti amonia, klorin, pembersih toilet, dll. yang dapat mempengaruhi hasil akhir dan tidak disarankan untuk membersihkan

PEMASANGAN

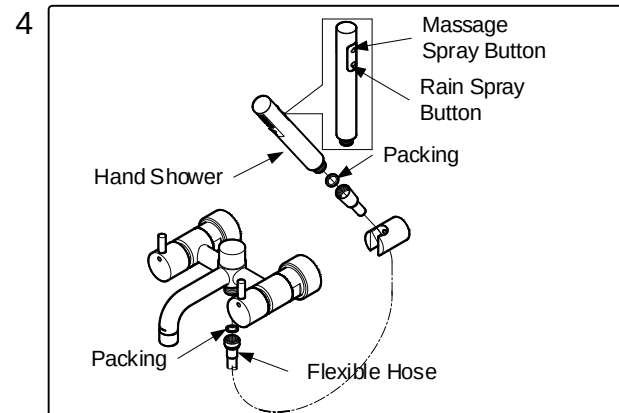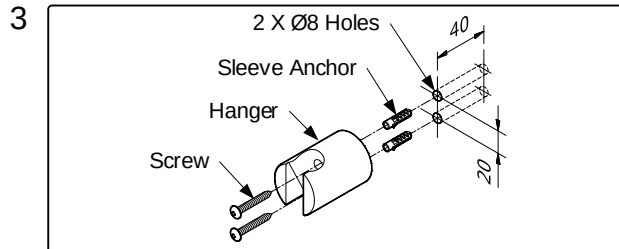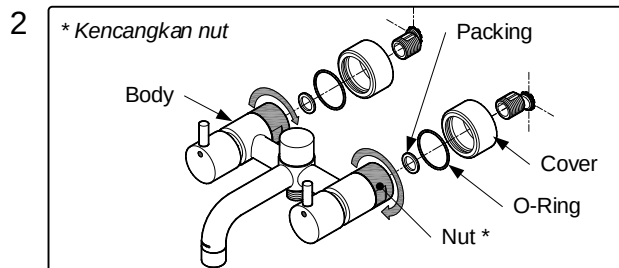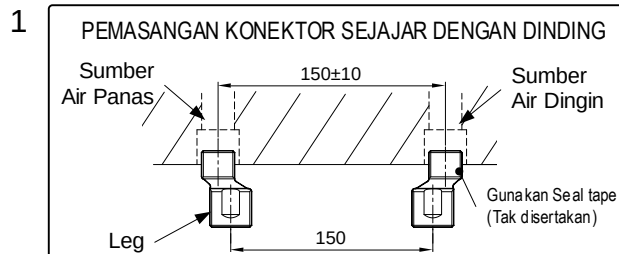

PENYELESAIAN MASALAH

MASALAH	POIN PERIKSA	SOLUSI
Pacaran tidak memuaskan	1	Bersihkan
Aliran tidak memuaskan	2	Lepas & Bersihkan
Air bocor disekitar handle	3	Kencangkan
Handle longgar	4	Kencangkan

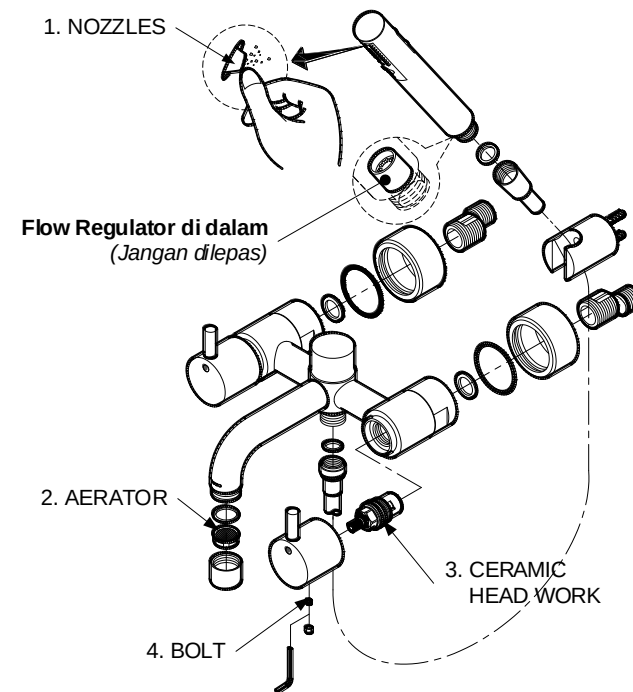

PERHATIAN

1. Jangan gunakan pembersih atau pelarut abrasif pada faucet dan fitting.
2. Flow Regulator tidak boleh dilepas karena dapat merusak sistem
3. Karena model produk terus mengalami pembaharuan, aktual produk mungkin tidak sama dengan gambar, tapi prinsip dasar pemasangan adalah sama.
4. Sisi pasokan air panas pada kran faucet berada dalam kondisi suhu tinggi. Jangan biarkan kulit menyentuh permukaan benda secara langsung. Kalau tidak, bisa terjadi kepanasan.