
TOTO

"MONO" MIXING VALVE FOR BATH & SHOWER W/ DIVERTER TX469SMBR

SPECIFICATIONS



OPERATING CONDITIONS

- 1. Water supply pressure: 0.05 ~ 0.75 MPa.
- 2. Ensure that water supply is clean (No Sand, Dirt, Etc.).


MAINTENANCE


Always wipe chrome plated area with dry soft cloth, and sometimes wipe it with cloth soaked in mild soap.


ATTENTION


Use of abrasive cleaning material such as; detergents containing hydrochloric acids, thinner, polishing powder, and nylon brush is not recommended.

INSTALLATION










TROUBLESHOOTING

PROBLEM	CHECK POINT	SOLUTION
Water leaks around the handle	1	Tiahten

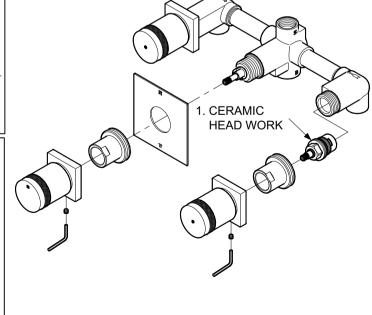

S06966B